FLEXIBLE BRONCHOSCOPE - SINGLE-USE

Ambu[®] aScope™ 4 Broncho Large ^{5.8/2.8}

Sterile, ready when you need it.

The single-use concept of aScope 4
Broncho once and for all solves the problem of accessibility, simplifies setup for procedures, eliminates the need for complex cleaning procedures and minimizes the risk of cross-contamination. It comes sterile straight from the pack, offering improved patient safety and workflow.

The aScope 4 Broncho Large offers high-quality bronchoscopy for a broad range of procedures. When connected to one of the portable monitors, Ambu aView™ 2 Advance or Ambu aView™, aScope 4 Broncho Large gives you clear visibility of the near and distal bronchial segments. The clear, sharp images and adaptive light control make identification of lung anatomy and navigation in the bronchial tree easy.

The high bending angles and precise tip motion of aScope 4 Broncho Large allow you to easily navigate into all segments of the lung. The high-quality handle is designed with a shaped, rippled surface to provide a comfortable grip throughout the procedure. The lightweight and ergonomic design makes aScope 4 Broncho Large easy to use.

The aScope 4 Broncho Large has a working channel that is ideal for a wide range of bronchoscopy procedures, including BAL & BW procedures.

Ambu[®] aScope[™] 4 Broncho Large ^{5.8/2.8}



KEY BENEFITS

Instant availability

No risk of cross-contamination

Cost-effective

High degree of usability

Clear, sharp images

Smooth and easy navigation



SPECIFICATIONS

Optical system	
Field of view	85°
Direction of view	0° (forward viewing)
Depth of field	6-50 mm
Illumination method	LED
Insertion portion	
Bending section	180° up, 160° down
Insertion cord diameter	180° up, 160° down
Distal tip diameter	6.3 mm (0.25")
Maximum diameter of insertion portion	6.3 mm (0.25")
Minimum endotracheal tube size (inner diameter)	7.0 mm
Minimum double lumen tube size (inner diameter)	-
Working length	600 mm (23.6")
Channel	
Average inner diameter	2.8 mm (0.110")
Minimum instrument channel width	2.6 mm (0.102")
Suction connector	
Connecting tube inner diameter range	6.5 mm - 9.5 mm
Operating environment, storage 8	k transportation
Temperature in operating environment	10 ~ 40 °C (50 to 104 °F)
Temperature during transportation	10 ~ 40 °C (50 to 104 °F)
Temperature during storage	10 ~ 25 °C (50 ~ 77 °F)
Relative humidity	30 ~ 85 %
Atmospheric pressure	80 ~ 109 kPa
Sterilization	
Method of sterilization	ETO



Ambu aScope 4 Broncho Large and Ambu aView 2 Advance




The ergonomic and lightweight handle is designed to give you a firm and comfortable grip

ORDERING SPECIFICATIONS

Item no.	Quantity (Ambu® aScope™ 4 Broncho Large ^{5.8/2.8})
478001000 Canada Only	5/box
478101000 US Only	5/box

To facilitate introduction of Luer Lock syringes and soft endoscopic accessories through working channel

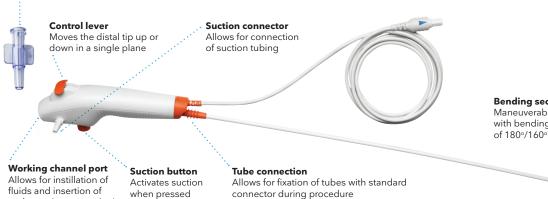

Bending section Maneuverable part with bending angle

connector during procedure



endoscopic accessories*

Ambu, Inc. 6721 Columbia Gateway Drive, Suite 200 Columbia, Maryland 21046 Tel. 800 262 8462 Fax 800 262 8673 ambuUSA.com

Distal tip

Contains the camera, light source (two LEDs), as well as the working channel exit

*There is no guarantee that accessories selected solely using this minimum instrument channel width will be compatible in combination.